




1.4 Megapixel CCD USB 2.0 Camera

High Resolution CCD Color or Monochrome
Microscopy Camera for Quantitative Image Analysis

Outline

Meiji Techno's *CC1400U* microscopy camera is designed for use in a wide variety of scientific and industrial applications requiring optimal color reproduction and extreme sensitivity.

With 1392x1040 resolution and on-board processing, these cameras deliver outstanding image quality and value for challenging low light applications such as fluorescence and NIR.

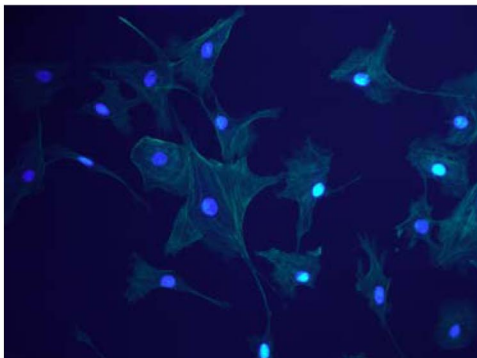

Uncompressed images in live streaming video and still-image capture are provided across a USB 2.0 digital interface. No framegrabber is required.

On-board memory buffering is included to guarantee image delivery to host computer. *CC1400U* model cameras are offered in both enclosed and OEM board-level form. Custom form factor (sizes) can be provided.

The *CC1400U* includes INFINITY ANALYZE software for advanced camera control, image processing, measuring and annotation, and INFINITY CAPTURE. Both color and monochrome product models are available.

All *Meiji* products are supported by an experienced team of software developers and application engineers. We understand your imaging needs and are here to help you with your integration and development.

Performance Features


- ❑ The low noise characteristic of the *CC1400U* progressive scan 1.4 megapixel CCD image sensor results in crisp color quality for the most demanding brightfield, phase contrast, and fluorescent applications including GFP, FISH, NIR, FRET, life science and geology
- ❑ High-speed USB 2.0 (480Mbps/sec) interface eliminates a framegrabber and facilitates ease of installation on both laptop and desktop computers
- ❑ Available in color or monochrome
- ❑ Full color sub-windowing allows for rapid focus and scanning of samples: 15 fps at full 1392x1040 resolution
- ❑ Select 8 & 12-bit pixel data modes
- ❑ The RGB data captured through each pixel contains 36-bits of color image information resulting in 4096 intensity values
- ❑ Camera control through an intuitive user TWAIN interface results in rapid image capture archiving and documentation for high throughput applications, demanding research environments and teaching facilities
- ❑ The *CC1400U* has a compact design equipped with a C-mount facilitating installation on all microscope configurations including upright, inverted and stereo
- ❑ Both custom design services and a Software Developer's Kit (SDK) are available to help with unique design requirements and software integration
- ❑ *CC1400U* cameras are software compatible with Windows 2K, Windows XP, Windows Vista and MAC OS 10.4 operating systems
- ❑ Full one (1) year warranty

Specifications


CC1400U

Camera Sensor



Image Sensor	Sony ICX285 2/3" format, 1.4 megapixel color or monochrome progressive scan CCD sensor
Effective Pixels	1392 X 1040, 1.4 million pixels
Frame Rate	15 fps at 1392x1040, increased through binning and ROI
Digital Output	8 and 12-bit
Dark Current (e-/s)	2 electrons / pixel / s
Pixel Size	6.45µm X 6.45µm
Full well capacity	>18,000 electrons
Readout Noise	8 e- rms
Readout Frequency	28.6 MHZ
Power Requirement	USB bus power, or external 5VDC - 500mA
Power Consumption	~2.5 watts
Operating Temperature	0° C to +50° C
Operating Humidity	5%-95%, Non-condensing
Integration Time	3.5µs to 60 seconds
Shutter	Global shutter
Auto Exposure	Automatic / Manual
White Balance	Automatic / Manual
Gain	Programmable / 1 to 10X
Interface	USB 2.0 high-speed interface for data transmission
Dimensions (L x W x H)	3.85 x 2.00 x 2.75 inches
Lens Mount	C-Mount lens adapter
Binning Options	2x2, 3x3, 4x4

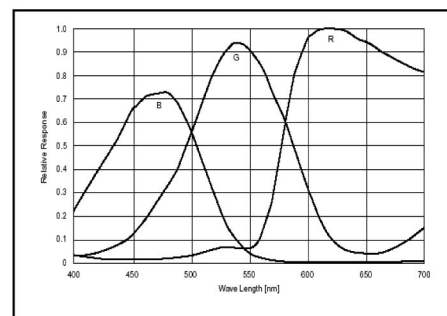

Color Response Curve

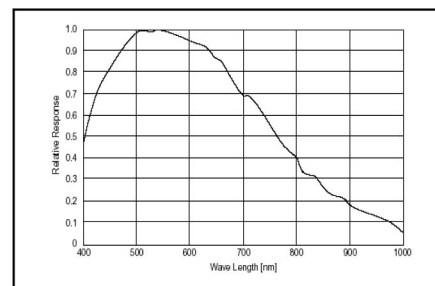

Mono Response Curve

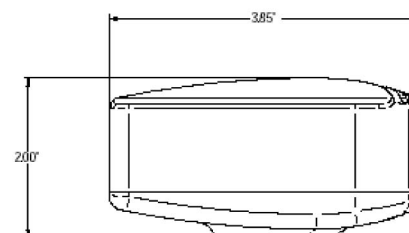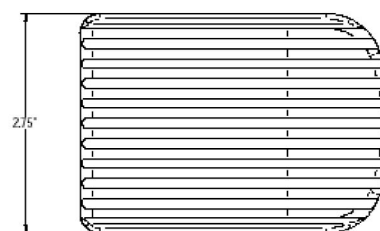

Applications

Fluorescent Microscopy
 Green Fluorescent Protein Applications
 Fluorescent In Situ Hybridization
 DNA Analysis
 Live Cell Imaging
 Brightfield, Darkfield, DIC/Phase techniques
 Near IR Applications
 Histology, Pathology and Cytology
 Forensic Analysis
 Semiconductor Inspection
 Metallurgical Microscopy
 Gel Documentation

Ordering Information

CC1400U	- Color 1.4 MP CCD Camera
CC1400MU	- Monochrome 1.4 MP CCD Camera

Full customization available to meet your exact needs!